


PROJECT APEX: MEDICAL CLINIC FIT-OUT

VISUAL ANNEX: WBS, COST PLANNING & BIM COORDINATION STRATEGY


1. Work Breakdown Structure (WBS) Architecture

The hierarchical decomposition of the total scope of work to be executed by the project team. This directly structures our project cost codes and baseline schedule control accounts.

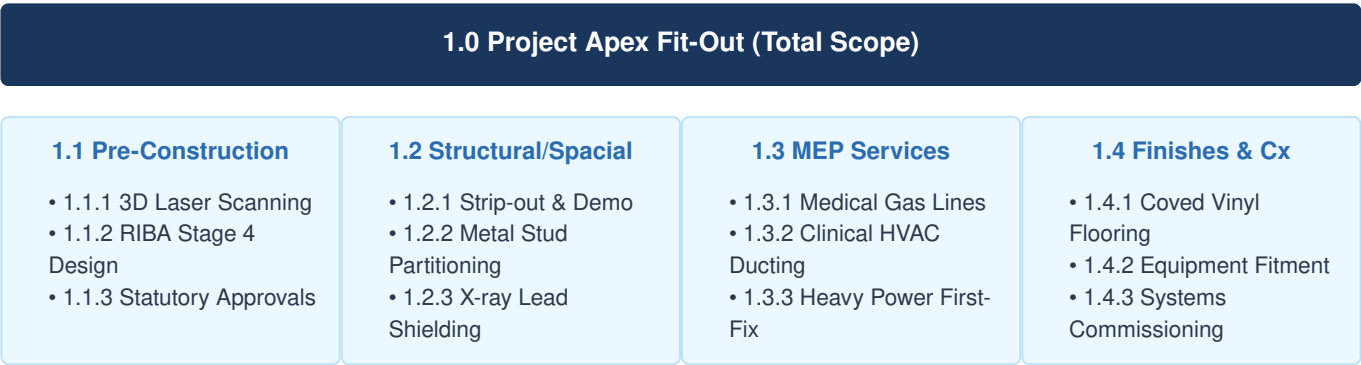

2. Baseline Cost Plan Breakdown (£650,000 Target)

A data visualization of the initial capital distribution mapped directly against targeted work disciplines.

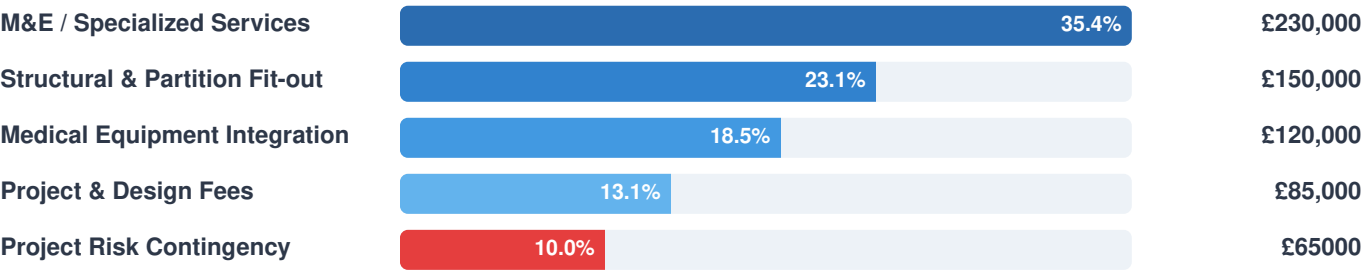

3. BIM Coordination & Clash Detection Framework

To eliminate on-site spatial errors and reduce expensive structural variations, the project implemented a strict **BIM (Building Information Modeling) Level 2 / ISO 19650** workflow strategy.

 **Common Data Environment (CDE) Protocols**

All design assets (Architectural models, Structural framing layouts, and detailed MEP system routing maps) were hosted on a centralized, cloud-based Autodesk Construction Cloud environment acting as the single source of truth.

Automated Hard & Soft Clash Detection Matrix

Prior to releasing drawings for procurement or on-site execution, automated spatial audits were run weekly using clash detection parameters:

- **Hard Clashes (Physical Intersection):** Caught 14 unique instances where medical gas trunking intersected with load-bearing structural columns. Corrected digitally by re-routing conduits in the model prior to fabrication, preventing an estimated £12,000 in on-site remedial rework.
- **Soft Clashes (Clearance & Maintenance Space):** Identified instances where heavy HVAC inline filtration systems lacked the statutory clearance required for annual NHS clinical air filter replacements. The model was adjusted to lower the access panels, protecting operational asset management parameters.